

S/180/61/000/002/001/012  
E073/E535

**AUTHORS:** Kochnov, V. Ye. and Zlochevskaya, I. I. (Chelyabinsk)

**TITLE:** On the Initial Stage of Plastic Deformation of Commercial Iron

**PERIODICAL:** Izvestiya Akademii nauk SSSR, Otdeleniye tekhnicheskikh nauk, Metallurgiya i toplivo, 1961, No.2, pp.60-63

**TEXT:** B. S. Kasatkin (Izv. AN SSSR, OTN, Metallurgiya i toplivo, 1959, No.5, 59) found that in the early stages of deformation ( $\epsilon = 2-4\%$ ) slipping proceeds along numerous planes but only to a small extent. He identified three types of slip lines. N. S. Alferova et al. (Ref.2) obtained the first pictures of the surface of steel X18H9T (Kh18N9T), which was deformed at 700°C. In the work described in this paper the structure of the surface of low carbon steel specimens was investigated which was stretched at room temperature. Strips 10 to 12 mm wide, 0.5 mm thick of steel (0.07% C, 0.37% Mn, 0.08% Si, 0.04% Ni, 0.07% Cr) were reduced by means of a laboratory rolling stand to a thickness of 0.20 to 0.25 mm. After rolling, the strips were vacuum annealed at 700°C for 20 min and then subjected to slow cooling.

Card 1/4

On the Initial Stage of ...

S/180/61/000/002/001/012  
E073/E535

The annealed specimens were etched in a 15% solution of sulphuric acid for the purpose of cleaning the surface from traces of oxides. Specimens 85 to 90 mm long, 6 mm wide were cut from etched strips and deformed with a critical reduction so as to obtain a coarse grain during the subsequent annealing. After this deformation, the specimens were polished in an electrolyte containing 88% orthophosphoric acid and 12% chromium anhydride. The polishing time was 4 to 5 min with a current intensity of 70 A/dm<sup>2</sup> and an electrolyte temperature of 30-40°C. For metal vacuum deposition, the polished specimens were heated at a vacuum of 10<sup>-4</sup> mm Hg, with an electric current, to 900°C and held at that temperature for 5 to 6 min. During this time recrystallization took place and grain boundaries could be detected. The specimens were cooled by gradually reducing the intensity of the current flowing through them. Immediately after cooling, the specimens were stretched by the required value in a special rig. Prior to stretching, two thin transverse marks were made in the central part of the specimens spaced 18 to 22 mm apart. The accurate distance between the markings was measured with an accuracy of ±0.001 mm. For

Card 2/4

On the Initial Stage of ...

S/180/61/000/002/001/012  
E073/E535

studying the microstructure of the deformed metal by means of an electron microscope, a carbon film was deposited in vacuum and then removed after chemical dissolution of the metal. The carbon film is strong and permits obtaining a picture of the relief of the surface of the deformed metal with a sufficiently high accuracy. Optical microscopes did not reveal any visible changes in the microstructure of specimens stretched by 0.25%. However, electron microscopic investigation of the carbon replicas do reveal in some cases a change in the structure of the surface. Only in some sections of the surface is local deformation observed in the form of thin discontinuous slip traces with little contrast of varying widths (0.5-1 to 6-7  $\mu$ ). Electron microscopic studies of the surface of specimens stretched by 0.25-4% showed a very uniform and local plastic deformation in the initial stage. In the case of medium deformation (0.25% for a 20 mm gauge length) elementary displacements occurred inside the grains. On increasing the deformation, the character of the displacement processes remains the same but rougher sliding traces occur, which are obviously localized in grain fragments, as can be seen from microphotographs, which are reproduced in the paper. The following conclusions are arrived at: Card 3/4

On the Initial Stage of ...

S/180/61/000/002/001/012  
E073/E535

1. Plastic deformation was observed in specimens of commercial iron subjected to stretching even if the deformation was in the elastic range;
  2. initially deformation is localized in zones which become wider during the further progress of deformation;
  3. deformed sections were observed in the neighbourhood of grain boundaries as well as in the body of the grain;
  4. it is assumed that displacement of grains relative to each other is due to their change in shape in view of slipping along numerous planes, even if the magnitude of the slipping is very small.
- There are 2 figures and 6 references: all Soviet.

SUBMITTED: November 10, 1960

Card 4/4

S/137/62/000/003/117/191  
A060/A101

AUTHORS: Kochnov, V. Ye., Zlochevskaya, I. I.

TITLE: Electron-microscope study of the initial stage of plastic deformation of commercial iron

PERIODICAL: Referativnyy zhurnal, Metallurgiya, no. 3, 1962, 21, abstract 31126 ("Sb. nauchno-tekhn. tr. N.-1. in-t metallurgii Chelyab. sovmarkhosa" 1961, no. 3, 200 - 203)

TEXT: An electron-microscope study was carried out of the initial stage of plastic deformation of Fe containing 0.07% C, 0.37% Mn, 0.08% Si. Strips 10-12 mm wide were cut out of a 0.5 mm thick sheet, then they were rolled down to a thickness of 0.20 - 0.25 mm and thereupon annealed for 20 min at 700° in vacuum. After taking off the scale, specimens 85 - 90 mm long and 6 mm wide were cut out of the strips, then deformed by 6 - 8% and subjected to electrolytic polishing in phosphor-chrome electrolyte. The polished specimens underwent recrystallization annealing in a vacuum installation under current heating up to 800°C. After soaking at that temperature for 4 - 5 min the specimens were slowly cooled by reducing the current flowing through them. Immediately after the annealing the

Card 1/3

Electron-microscope study ...

S/137/62/000/003/117/191  
A060/A101

specimens were deformed by tension; the degree of deformation was determined from the distance between the lines specially marked on the surface of the specimen with a base distance of 18 - 22 mm. The electron-microscope investigations were carried out with the aid of carbon replicas separated out of the metal in a weak solution of  $\text{HNO}_3$ . It is shown that specimens deformed by tension by 0.25 - 1.2% have a very nonuniform and local character of plastic deformation. In the initial stage (elongation by 0.25%) the plastic deformation occurs by slipping of comparatively thin layers with respect to each other by small distances. Such elementary shears occur along a large number of planes and at low degrees of deformation are localized in strips. The width of strips occupied by closely situated slip lines is not uniform and varies between the limits of 0.5 - 7  $\mu$ . The slip lines are oriented at various angles from 0° to 90° with respect to the grain boundaries. The strips originate not only in the neighborhood of grain boundaries, but also in the middle of grains. The hypothesis is announced that the site of arising and the region of spread of strips with thin slip lines is determined by a combination of local stresses in the specimen and the corresponding crystallographic planes. As the deformation increases, the number of elementary shears increases and at deformations of the order of 1 - 1.2% they already occupy a considerable part of the grain surface. The sites of

Card 2/3

Electron-microscope study ...

S/137/62/000/003/117/191  
A060/A101

termination of such sharper slip traces have a two-fold character: the slip traces either vanish smoothly with a necessary thinning down at the very end, or else they terminate abruptly at some boundary within the grain or an impurity. The conclusion is drawn that slip traces are, apparently, localized at grain fragments. The boundaries between the fragments may play a two-fold role: they may be the sources of the slip lines or, on the contrary, they may impede the development of slip over the grain. An analogous role is ascribed to impurities in the metal.

L. Gordiyenko

[Abstracter's note: Complete translation]

Card 3/3

KOCHNOV, V. Ya. (Chelyabinsk); GOL'DSHTEYN, V. Ya. (Chelyabinsk)

Kinetics of recrystallisation of electrical steel during its  
annealing. Izv. AN SSSR, Otd. tekhn. nauk. Met. i topl. no. 6:  
61-66 N-D '62. (MIRA X:1)

(Steel—Heat treatment)  
(Crystallisation)



S/126/62/014/005/004/015  
E111/E435

AUTHORS: Zatselin, S.V., Kochnov, V.Ye.

TITLE: Structure of slip lines

PERIODICAL: Fizika metallov i metallovedeniye, v.14, no.5, 1962,  
673-677

TEXT: It is impossible to study with the electron microscope changes in the fine structure along slip lines because of their considerable length. An optical method for this purpose is described, based on the examination of the surface with dark-field illumination: the slip lines appear bright under these conditions. The relative extent of the brightness along the lines indicates differences in formation during deformation and enables the sizes of the fine slip lines and their development along the whole slip line to be evaluated. Deformation nonuniformity was observed not only in passing from grain to grain and within one grain but also along a slip line, this being particularly pronounced in "hatchuring" of the lines. As deformation increases the height of the shear steps in lines near grain boundaries decreases. In the central parts of the grains there

Card 1/2

Structure of slip lines

S/126/62/014/005/004/015  
E111/E435

is both a general decrease in the height of shear steps and the development in some lines of coarse slip for deformations up to 10%. The method was studied with type X 20H80 (Kh2CN80) nichrome, rolled, heat treated and cooled in vacuum and electropolished. There are 4 figures. ✓

ASSOCIATION: Chelyabinskiy nauchno-issledovatel'skiy institut metallurgii (Chelyabinsk Scientific Research Institute of Metallurgy)

SUBMITTED: February 13, 1962

Card 2/2

ZATSEPIN, S.V.; KOCHNOV, V.Ye.

Structure of slip bands. Fiz.met.i metalloved. 14 no.5:673-  
677 N '62. (MIRA 15:12)

1. Chelyabinskiy nauchno-issledovatel'skiy institut  
metallurgii.  
(Metallography) (Dislocations in metals)

**BAYAZITOV, M.I.; KOCHNOV, V.Ye.**

Investigating cold-rolled transformer steel by the internal  
friction method. *Vizn. met. i metalloved.* 15 no.1:113-118 Ja '63.  
(MIRA 16:2)

1. Chelyabinskiy institut metallurgii.  
(Sheet steel—Magnetic properties) (Internal friction)

KOCHNOV, V.Ye.; BAYAZITOV, M.I.

Solubility of nitrogen and carbon in cold-rolled transformer  
steel. Fiz. met. i metalloved. 15 no.6:937-941 Ja '63.

(MIRA 16:7)

1. Chelyabinskiy nauchno-issledovatel'skiy institut metallurgii.  
(Steel-Inclusions) (Solubility)

KOCHNOV, V.Ye.; GERSHMAN, R.B.; BELIKOV, A.M.

Methods of revealing the substructure of metals. Fiz. met. i metalloved. 16 no.1:152-155 J1 '63; (MIRA 16:9)

1. Chelyabinskiy nauchno-issledovatel'skiy institut metallurgii. (Metallography) (Metals—Pickling)

MOLOTOLOV, B.V.; KOCHNOV, Y.Ye.; MELIKOV, A.M.; GURSHMAN, R.B.

Methods of revealing the substructure in electrical steel. Stal'  
23 no.3:251-252 Mr '63. (MIRA 16:5)

1. Tsentral'nyy nauchno-issledovatel'skiy institut chernoy  
metallurgii i Chelyabinakiy nauchno-issledovatel'skiy institut  
metallurgii.

(Iron-silicon alloys—Pickling)

KOCHNOV, V.I.; GOL'DSHTEIN, V.Ya.

Recrystallization stages in transformer steel. Fiz. met. i  
metalloved. 15 no.5:685-689 My '63. (MIRA 16:8)

1. Nauchno-issledovatel'skiy institut metallurgii, Chelyabinsk.  
(Stal-Metallography) (Crystallization)



KOCHNOV, V.Ye.

Determination of oriented grains in alpha-iron from etching  
figures. Zav. lab. 29 no.10:1205 '63. (MIRA 16:12)

1. Chelyabinskiy nauchno-issledovatel'skiy institut metallurgii.

GERSHMAN, R.B., inzh.; GELIKOV, A.M., inzh.; KOCHMOV, V.Ye., inzh.;  
GOL'DSHTEYN, V.Ye., inzh.; VASIL'YEVA, S.M.

Effect of a bend in electrical steel on its magnetic  
properties. Elektrichestvo no.11:62-63 N '63.

(MIRA 16:11)

1. Nauchno-issledovatel'skiy institut metallurgii,  
Chelyabinsk.

ACCESSION NR: AP4029843

S/0279/64/000/002/0172/0176

AUTHOR: Zatsopin, S.V. (Chelyabinsk); Elochevskaya, I.I. (Chelyabinsk); Kochnov, V.Ye. (Chelyabinsk)

TITLE: The micro relief on the surface of nickel-chromium alloys during small plastic deformations

SOURCE: AN SSSR Izv. Metallurgiya i gornoye delo, no.2, 1964, 172-176

TOPIC TAGS: micro relief, Kh20Ni80 alloy, EI437B alloy, nickel based alloy, chromium containing alloy, plastic deformation, high temperature alloy, optical microscopy, electron microscopy, shear

ABSTRACT: The authors determined the behavior of this metal in an elastic-plastic region and, consequently, the beginning of the metal flow and its tendency toward plastic deformation. The purpose of the present work was to study the deformation reliefs of plastically-deformed high-temperature alloys at room temperatures and small degrees of deformation. The investigation was made by optical and electron microscopy on samples on Kh20Ni80 and EI437B alloys. Microphotographs of the surfaces of these alloys were presented which show various stresses and shears of the surface. The photographs of the micro-reliefs showed extremely nonuniform deformation.

Card 1/2

ACCESSION NR: AP4029843

tion of grains in the initial stages of deformation. In most instances, the great magnitude of shears was observed within the grains. In the initial stages of deformation, no thin structure of the slip lines in the alloys under study was observed. The process of forming slip lines into bands can obviously occur due to the transition of the helical dislocations from one surface to the other, parallel to the initial. The strengthening phase leads to the decrease of the active systems and to an increase of shear along the slip planes. Orig. art. has: 5 figures.

ASSOCIATION: none

SUBMITTED: 17Jun63

DATE ACQ: 30Apr64

ENCL: 00

SUB CODE: ML

NO REF SOV: 002

OTHER: 001

Card 2/2



"APPROVED FOR RELEASE: 09/18/2001

CIA-RDP86-00513R000723520012-9

APPROVED FOR RELEASE: 09/18/2001

CIA-RDP86-00513R000723520012-9"

KOCHNOV, V.Ye.

Effect of rapid cooling and subsequent heating on specific  
losses of cold-rolled electrical steel. Fiz. met. i metalloved.  
18 no.3:478-480 S '64. (MIRA 17:11)

1. Chelyabinskiy nauchno-issledovatel'skiy institut metallurgii.

**"APPROVED FOR RELEASE: 09/18/2001**

**CIA-RDP86-00513R000723520012-9**

**APPROVED FOR RELEASE: 09/18/2001**

**CIA-RDP86-00513R000723520012-9"**



"APPROVED FOR RELEASE: 09/18/2001

CIA-RDP86-00513R000723520012-9

ENC: 00

APPROVED FOR RELEASE: 09/18/2001

CIA-RDP86-00513R000723520012-9"

KOCHNOV, V.Ye.; ZVEREVA, V.A.; GERSHMAN, R.B.; VASIL'YEVA, S.M.

Formation and decomposition of austenite in cold-rolled transformer steel. Fiz. met. i metalloved. 19 no.6:926-929 Ja '65. (MIRA 18:7)

1. Nauchno-issledovatel'skiy institut metallurgii, Chelyabinsk.

3

1. 3192-66 EMP(e)/EMP(m)/EMP(s)/EMP(i)/EMP(t)/EMP(b)/EMA(h) JD/MN/DJ/ME  
 ACC NR: AP5024999 SOURCE CODE: UR/0286/65/000/014/0062/0062

AUTHORS: Uvarov, V. Ya.; Glebov, Yu. P.; Zhuravlev, P. V.; Yermakov, M. Z.;  
Rubin, Yu. L.; Zakharov, M. Y.; Lozhova, O. P.; Sulhanova, N. F. 53  
 8

ORG: none

TITLE: Lubricant for heat treatment of metals. Class 2), No. 173869 (announced  
 by the Organization of Mosgorsovmarkhoz (Organizatsiya mosgorsovmarkhoz))

SOURCE: Syulleten' izobreteniy i tovarnykh znakov, no. 16, 1965, 62

TOPIC TAGS: lubricant, metal heat treatment, mineral oil

ABSTRACT: This Author Certificate presents a mineral oil and graphite lubricant  
 for heat treatment of metals. To prevent metals from sticking to the instrument,  
 talcum and red lead are added to the lubricant. The talcum constitutes 10% by  
 weight of the additive, and the red lead constitutes 8-25% by weight.

SUB CODE: FP/ SUMM DATE: 06JUL66

Card 1/2 111 500: 665.5  
 07010762

BALEKHOVA, Ye. F.; ALYBINA, A. Yu.; KOCHUBOVA, G. P.; KHROMOV, I. I.;  
KAZANSKIY, B. A.

Catalytic conversions of cycloundecane in the presence of a  
new catalyst. *Doklady Akad. Nauk SSSR* 246:1042-1044, 1980.  
(1980:27:5)

1. Moskovskiy gosudarstvennyy universitet imeni M.V. Lomonosova,  
Kafedra khimii nefti.

KOCHNOVA, I. Ye. Dr. Med. Sci.

Dissertation: "The First Clinical-X-Ray Changes During the Initial Stage of Tuberculosis of the Lungs in Adults." First Moscow Order of Lenin Medical Inst.  
14 Apr 47.

SO: Vechernyaya Moskva, Apr, 1947 (Project #17836)

KOCHNOVA, I. Ye.

"Clinico-Roentgenological Examinations of the Development and Course of  
Pneumonia Foci in Normal Cases,"  
Prob. Tuber., No. 2, 1949.

Cent. Sci. Res. Inst. Roentgenology & Radiology in. V. M. Molotov, Moscow

KOCHNEVA, I. Ya. professor

Methods of teaching about tuberculosis. Sov.med. 21 no.1:94-95  
Ja '57. (MLBA 10:6)

1. Is kafedry tuberkulosa II Moskovskogo meditsinskogo instituta  
imeni I.V.Stalina.

(TUBERCULOSIS, PULMONARY, educ.  
mass auscultation methods & appar.)

(AUSCULTATION

mass auscultation methods & appar. for students  
in lectures on tuberculosis)

*RUC-11000, I.Ye.*

USSR/Pharmacology and Toxicology - Chemotherapeutic Preparation  
Antitubercular Drugs.

7-9

Abs Jour : Ref Zhur - Biol., No 14, 1953, 66422

Author : Kochneva, I.Ye.

Inst

Title : On the Importance of Drug Resistance in the Treatment of  
Patients with Pulmonary Tuberculosis.

Orig Pub : Sov. Meditsina, 1957, <sup>2/</sup>No 6, 20-27.

Abstract : An investigation was made to see if drug resistant bacteria existed in the pathological material obtained from 105 patients with various forms of tuberculosis (T), who were treated with various preparations in different combinations and during periods of various duration. One hundred and twenty-six of them had chronic fibrinocystic and hemtogenic disseminated pulmonary T. On the basis of an analysis of the data from the literature and his own observations the author came to the conclusion that

Card 1/2

*Chair of Tuberculosis, II Moscow Med Inst on I.V. Stalin*

USSR/Pharmacology and Toxicology - Chemotherapeutic Preparation  
Antitubercular Drugs.

V-9

Abs Jour : Ref Zhur - Biol., No 14, 1953, 66422

the problem of drug resistance in the clinical aspects of T is complex and contradictory, although resistance to drugs is of definite importance in the treatment of T; sometimes even in the presence of resistant bacteria the cure of T is possible with prolonged therapy. The author believes that in evaluating the indications for continuation of antibacterial therapy in the presence of drug resistant tubercle bacteria, the clinician has to make a decision on the basis of the general condition of the patient. -- Bibliography with 16 titles. -- V.I. Tel'nik

Card 2/2



*I. Kochnova*  
KOCHNOVA, I.Ye., prof.

Chemotherapy in early manifestations of tuberculosis. Sov.med. 21  
no.9:18-26 8 '57. (MIRA 11:1)

1. Iz kafedry tuberkuleza II Moskovskogo meditsinskogo instituta  
imeni N.I.Pirogova.  
(TUBERCULOSIS, PULMONARY, ther.  
in early stage, follow-up)

KOCHKOVA, I.Ye., prof.; MIKHAYLOVA, O.N.; TRENKOVA, V.R.; ROZMAINSKAYA,  
Z.N.; MALOVA, M.V.; KISLYAKOVA, N.V.

Tuberculosis vaccination in adult subjects with a positive tuberculin  
reaction. Sov.med. 2) no.12:58-63 D '59. (MIRA 13:4)

1. Is kafedry tuberkuleza (sveduyushchiy - prof. I.Ye. Kochkova) II  
Moskovskogo meditsinskogo instituta imeni N.I. Pirogova.  
(BOG VACCINATION)

KOCHENOVA, I.Ye., prof.

Development of cavernous processes from lesser forms of tuberculosis;  
according to data collected before antibacterial therapy and during  
antibiotic and drug therapy. Sov. med. 24 no. 5:22-28 My '60.  
(MIRA 13:10)

1. Is kafedry tuberkuleza VI Moskovskogo meditsinskogo instituta  
imeni N.I. Pirogova.

(TUBERCULOSIS)

KOCHNOVA, I.Ye., prof.

First All-Russian Congress of Phthisiologists. Sov. med. 24  
no. 5:139-142 My '60. (MIRA 13:10)  
(TUBERCULOSIS—CONGRESS)

2

KOCHNOVA, I.Ya., prof.; MAYAT, V.S., prof.

Treatment of tuberculosis of the skeletal muscles with antibacterial preparations. Sov.med. 25 no.8:47-52 Ag '60. (MIRA 13:9)

1. Is kafedry gosital'noy khirurgii i tuberkuleza II Moskovskogo meditsinskogo instituta imeni N.I.Pirogova.  
(MUSCLES—TUBERCULOSIS)

KOGHNOVA, I.Ye., prof.; MAYAT, V.S., prof.

Thoracic hospitals in Great Britain, Sov.med. 25 no.2:110-113  
P '61. (MIRA 14:3)

(GREAT BRITAIN—HOSPITALS)

KOCHNOVA, I.Ye.; MIKHAYLOVA, G.N.

Results of treating tuberculosis with metazide. Khim. i med. no.14:  
56-64 '60. (MIRA 14:12)

1. Kafedra tuberkuleza (sav. - prof. I.Ye.Kochnova) II Moskovskogo  
meditsinskogo instituta imeni N.I.Pirogova.  
(TUBERCULOSIS) (METAZIDE)

KOCHNOVA, I.Ye., prof.; MAYAT, V.S., prof.

"X-ray diagnosis of calcification and heterogenetic ossification"  
by V.A.D'iachenko. Reviewed by I.E. Kochnova and V.S.Maiat. Sov.  
med. 25 no.1:154-155 Ja '62. (MIRA 15:4)

(OSSIFICATION) (CALCIFICATION) (DIAGNOSIS, RADIOSCOPIC)  
(D'IACHENKO, V.A.)



KOCHNOVA, I. Ye., prof.; MAYAT, V. S., prof.

Pathogenic, diagnostic and therapeutic problems in tuberculosis  
of the frontal bone. Khirurgiia 38 no.5:77-81 My '62.

(MIRA 15:6)

1. Iz kliniki ftiziatrit i gospiatal'noy khirurgii II Moskovskogo  
meditsinskogo instituta imeni N. I. Pirogova.

(FRONTAL BONE—TUBERCULOSIS)

MOCHINOVA, I.Ye., prof.; SERENOV, A.D., prof.; YEVDOKIMOVA, A.D., dotsent;  
TAZUROVSKAYA, V.P., kand.med.nauk; TRIPCHNOVA, T.M.

Second All-Russian Conference of Phthisiologists. Sovet. med.  
27 no.9:134-137 8'63 (MIRA 17:2)

KOCHNOVA, I.Ye., prof.; ROMASHKINA, Z.S.; YABLOKOVA, T.B., kand. med. nauk; KOZHEVNIKOVA, T.P.

Diagnostic value of the tuberculin "mark" in the examination of adults for tuberculosis. Sov. med. 26 no.4:82-86  
Ap '63. (MIRA 17:2)

1. Iz kafedry tuberkuleza (sav. - prof. I.Ye. Kochnova) II Moskovskogo meditsinskogo instituta imeni N.I. Pirogova i Kontrol'nogo instituta meditsinskikh biologicheskikh preparatov imeni L.A. Tarasevicha.

MAZAR, V.S., prof.; KOZIMOVA, I.Ye., prof.

Development and course of pulmonary disease. Khirurgiya  
49 no.4:107-110 Ap '64. (MIRA 181)

1. Kafedra gosital'noy khirurgii i kaf. dyaetologii i II  
Moskovskogo meditsinskogo instituta im. N.I. Pirogova.

KOCHIMOVA, I.Ye., prof.; TRIFONOVA, T.M., docent; PAVLOVSKAYA, V.F.

Seventh All-Union Congress of Phthisiatrists. Sov. med. 28  
no.6:144-147 Jo '65. (MIRA 18:8)

KOCHNIKOVA, I.Yu., prof. (Moskva)

Achievements and tasks of tuberculosis control at the present  
stage. Sov.med. 28 no.12:3-9 D '65.

(MIRA 18:12)

KOCHKOVA, O.I.

Children in the drug store. Zdorov'e 6 no.4:30 Ap '60,  
(MIRA 13:6)  
(VITAMINS)

KOCHEROVA, O.I.

Medicine bottle labels. Zdanov's 6 no.7:31 Jo '60.

(NIRA 13:7)

(LABELS)



KOCHNOVA, O.I.

Old prescriptions. Zdorov's 7 no. 2:31 F '61. (MIRA 14:2)  
(MEDICINE—FORMULAE, RECEIPTS, PRESCRIPTIONS)

KOCHNOVA, O.I.

Bactericidal leukoplastic. Zdorov'e 7 no.6:31 Je '61.

(MIRA 14:7)

(PLASTERS (PHARMACY))

KOCHNOVA, O.I.

A convenient bandage. Zdorov's 8 no.3131 Mr '62.  
(BANDAGES AND BANDAGING)

(MIRA 15:4)

**SOROKIN, M.F.; KOCHNOVA, Z.A.**

Polymers of glycide ethers. Report No.4: Obtaining polymers of  
alkyl glycide ethers in the presence of basic catalysts. Lak-  
kras.mat. i ikh prim. no.4:6-9 '62. (MIRA 16:11)

SOROKIN, M.F.; KOCHNOVA, S.A.; SHODE, L.O.; MIKHAYLOVA, L.S.

Polymers of glycidol ethers. Lakokras.mat.1 ikh.pri.  
no.3:4-12 '62. (MIRA 15:7)  
(Protective coatings)  
(Glycidol)

SOROKIN, M.P.; KOCHNOVA, Z.A.

Polymerisation of  $\alpha$ -oxide compounds; review of literature.  
Lakokras.mat.i ikh prim. no.5:89-96 '62. (MIRA 16:1)  
(Oxides) (Polymerization)

KOCHNOVA, Ye.I., prof.

The 17th International Conference on Tuberculosis. Sov. med. 27 no.  
3:147-149 Mr '64. (MIRA 17:11)

L 9839-63

RY/42/HAY

ACCESSION NR: AP3000385

EPR/EWP(j)/EPP(o)/EWT(m)/BDS--AVFTC/ASD--Pa-I/Pe-I/Pr-I--

8/0191/63/000/005/0011/0014

AUTHOR: Sorokin, M. F.; Latov, V. K.; Korkishko, Zh. T.; Kochnova, Z. A. 73

TITLE: Copolymers of unsaturated ethers of glycidol. Copolymerization of methyl methacrylate with allylglycidyl ethers in solutions

SOURCE: Plasticheskiye massy\*, no. 5, 1963, 11-14

TOPIC TAGS: copolymerization, methyl methacrylate, 2-propenyl 2,3-epoxypropyl, copolymerization rate, reaction temperature, initiator concentration, reactivity ratios, yields, molecular weight, benzoyl peroxide

ABSTRACT: Methyl methacrylate (MMA) and 2-propenyl 2,3-epoxypropyl ether (PEPE) have been copolymerized in methyl ethyl ketone, dioxane, or toluene solution at 70 to 80C in the presence of 0.5 to 1.0 mol% of benzoyl peroxide or Alpha,Alpha-azobisisobutyronitrile. The reaction was conducted under nitrogen in solutions whose initial concentration of the monomers was 30%, with MMA and PEPE in ratios of 2:1, 1:1, and 1:2. The copolymerization rate dropped with an increase in the PEPE content and increased with an increase

Card 1/2



L 9839-63

ACCESSION NR: AF3000395

0

in the reaction temperature or initiator concentration. Because MMA is much more reactive than PEPE, the MMA-PEPE ratio in the copolymers is much higher than that in the initial monomer mixture. The monomer reactivity ratios were calculated to be 40.7 for MMA and 0.035 for PEPE. The copolymers, obtained in yields of 41 to 86%, are white solids readily soluble in benzene, toluene, acetone, or dioxane. Their molecular weights vary from 2000 to 10,000, decreasing with an increase in the initial PEPE concentration, reaction temperature, or initiator concentration. Copolymers prepared in dioxane solution have the highest molecular weight. Orig. art. has: 5 figures and 4 tables.

ASSOCIATION: none

SUBMITTED: 00

DATE ACQ: 10Jun63

ENCL: 00

SUB CODE: 00

NO REF SOV: 000

OTHER: 011

Ja/m

Card 2/2

ACCESSION NR: AP4034711

5/0303/64/000/002/0007/0010

AUTHORS: Serokin, M. P.; Kochneva, S. A.; Kerkishko, Zh. T.

TITLE: Two-component polyurethane lacquers on the base of glycidyl ester polymers, synthesized in the presence of two- and three-functional initiators

SOURCE: Lakokrasochnyye materialy i ikh primeneniye, no. 2, 1964, 7-10

TOPIC TAGS: polyurethane lacquer, glycidyl ester, phenylglycidyl ester, butylglycidyl ester, glycidyl ester polymer, diisocyanate, triisocyanate, chemical film stability, lacquer film hardening, lacquer film adhesion

ABSTRACT: The base n-butylglycidyl ester polymer (BGEF) and the phenylglycidyl ester polymer (PGEF) were synthesized from the corresponding monomers by block polymerization at 90C in the presence of the initiators resorcinol, trimethylolpropane, and NaOH. While 30% resorcinol yielded linear polymers of an average molecular weight of 570, the same amount of trimethylolpropane produced branched polymers of molecular weights within the 760-775 range. The BGEF and PGEF polymers so produced were used to make lacquers by being blended with toluenediisocyanate (TDI), with 4,4'-diphenylmethanediisocyanate (MDI), or with 4,4',4"-triphenylmethanediisocyanate (TMD). Since the hardening of films of such two-

Card 1/2

ACCESSION NR: AP4034711

component compositions is caused by the formation of urethanes, the authors performed a series of tests, using various NCO:OH ratios, temperatures, and reaction periods. It was found that at 90C satisfactorily hardened films with high physico-mechanical properties and good appearance were obtained by blending the glycidyl esters of linear structure with TMD, and by blending the polymers of branched structure with TD or DMD. It was also found that for blends of the linear PGE polymer with TMD the optimum ratio of NCO:OH was 1.3:1. This yielded (at 90C) a completely hardened film within 6-7 hours. For the branched BGE and PGE polymers, the optimal ratios of NCO:OH in their blends with TMD were 1.4:1 and 1.1:1, and the hardening periods were 1 and 3 hours respectively. A period of 16-20 hours was required for hardening films of the branched BGE polymer blended with TD at a NCO:OH ratio of 1.4:1. The hardness, adhesion, and resistance to chemical agents of the lacquer films proved them to be of high quality. O. A. Vasil'yeva participated in the work. Orig. art. has: 4 charts, 3 tables, and 3 formulas.

ASSOCIATION: none

SUBMITTED: 00

DATE ACQ: 20May64

ENCL: 00

SUB CODE: MT

NO REF SOV: 004

ORDER: 006

Card 2/2

ACCESSION NR: AP4043819

8/0303/64/000/004/0001/0004

AUTHOR: Sorokin, M. F.; Kochnova, Z. A.; Korkishko, Zh. T.; Vasil'yeva, O. A.

TITLE: Premixed polyurethan coatings based on polymers of n-butyl- and phenylglycidyl ethers.

SOURCE: Lakokrasochnyye materialy i ikh primeneniye, no. 4, 1984. 1-4

TOPIC TAGS: premixed coating, prepolymer synthesis, cured film, chemically resistant coating, polymerized phenylglycidyl ether, polymerized n-butyl ether, toluylene diisocyanate, polyurethan, polyurethan film

ABSTRACT: Two types of prepolymers with isocyanate end groups were synthesized from linear or branched polymers of n-butyl or phenylglycidyl ethers and toluylene diisocyanate, using 30 mol. % trimethylolpropane or phenylglycidyl or resorcinol as initiators, respectively, to obtain premixed polyurethan coatings characterized by stability in storage. Two type-1 prepolymers were synthesized from the branched polymers at 60C. Both the polymer and the diisocyanate were used as 50% solutions in xylene, the temperature of the exothermic reaction did not exceed 20C, and the reaction was complete 1.5 hrs. after toluylene diisocyanate was added. Two type-2 prepolymers were synthesized at 70C from

Card 1/2

ACCESSION NR: AP4043819

the linear polymers and type 1 prepolymers (substituting for the toluylene diisocyanate). The reaction was complete within 40 min. or 1 hr. 40 min. depending upon which prepolymer (based on n-butyl or phenylglycidyl ether) was added. All four prepolymers were then used as premixed polyurethan coatings, stored well when protected from moisture for 4 (type 1) or 1.5 (type 2) months, were highly resistant to 12 months' exposure in 10 or 20% solutions of NaOH, 5 or 10% solutions  $H_2SO_4$ , distilled water or transformer oil, and had excellent physical and mechanical properties (single coat  $25\mu$  for type 1, 20- $21\mu$  for type 2, two coats 50-52 and 45-46 $\mu$ , respectively, impact strength 50 kg-cm for all, relative hardness 0.72 - 1.00). Both types of coating were cured for 6 hrs. at 100C. Orig. art. has: 6 tables, 2 graphs, and numerous chemical formulas.

ASSOCIATION: none

SUBMITTED: 00

ENCL: 00

SUB CODE: MT, OC

NO REF SOV: 001

OTHER: 002

Card 2/3

L 16038-65 ENT(m)/EXP(j)/T Pc-4 R  
 1700000000 NR: AF1047601

REF: AF40476-1

5/0303, 64/006, 005, 0001, 0005

AUTHOR: Sorokin, M. P., Korkishko, Zh. T., Kochanova, Z. A.

1. Component polyurethane varn has been

• Prasidnyaya materialy •

lacquer, polyurethane varnish, nitrocellulose lacquer, etc.

Tetrafunctional nitrogen-containing polyimides with pendant amine groups

...zed and were shot

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

... the character of ...

ACCESSION NR: AP4047671

calculated. Formulas are given for calculating the number of atoms of each element in a molecule.

None

SUBMITTED: 00

ENCL: 00

SUB CODE: MT, OC

NO REF SOV: 005

OTHER: 002

Card 2/2

U.S. 10-45 FWT(2)/EWP(3)/T Ps-A RM  
ACCESSION NR: AP6016947

UR/0303/85/000/003/0032/1035  
667.633.263.3


16  
B

ARTICLE: Borodin, M. P.; Kichanova, Z. A.; Zhukova, L. B.

As a base material (1) for the synthesis of polyurethane varnishes


1. 6. polyurethane varnish, glycidol ether, toluene diisocyanate, nitrogenous

was used. In order to obtain more stable polyurethane varnishes based on tetrafunctional glycidol ethers, polymers of glycidol ethers, the addition of a small amount of polyurethane with isocyanate groups from these polymers and toluene diisocyanate. The reaction may be represented as follows:

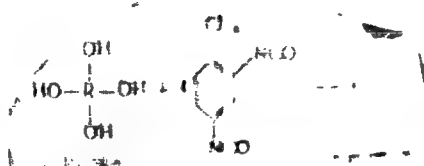



ACCESSION NR: AP6016047

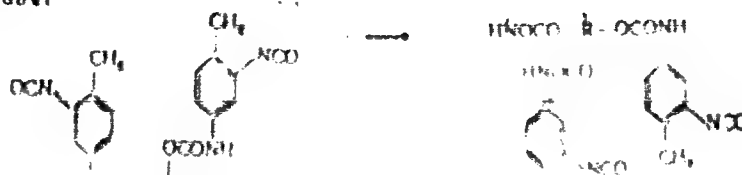

ENCLOSURE

OTHER

(N) 1 11653-66 EMT(m)/EMP(j) RM  
ACC NR: AP6001078 SOURCE CODE: UR/0303/65/000/006/0001/0006

AUTHOR: Kochmova, E. A. Sorokin, N. V. 44,55 44,55


ORG: none 15,44,55

TITLE: Polyurethane varnishes from "blocked" isocyanates and simple polyesters 44 B

SOURCE: Lakokrashchivnye materialy i ikh primeneniye, no. 6, 1965, 1-6

TOPIC TAGS: polymer, varnish, polyurethane, polyester, hardening

ABSTRACT: This work represents an attempt to obtain polyurethane varnishes from polymeric glycidic esters. It was desirable to impart unlimited storability to the varnishes and to prevent gelling on addition of pigments. To do so, "blocked" polyurethanes were synthesized which contained no residual free functional groups (hydroxyl and isocyanate groups). The synthesis of "blocked" polyurethanes was accomplished in two stages:

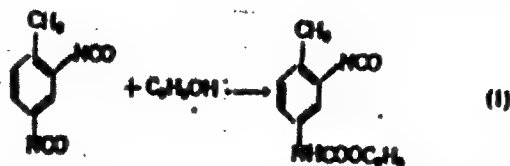


Card 1/2

UDC: 667.633.263.3

L 11653-66

ACC NR. AP6001678

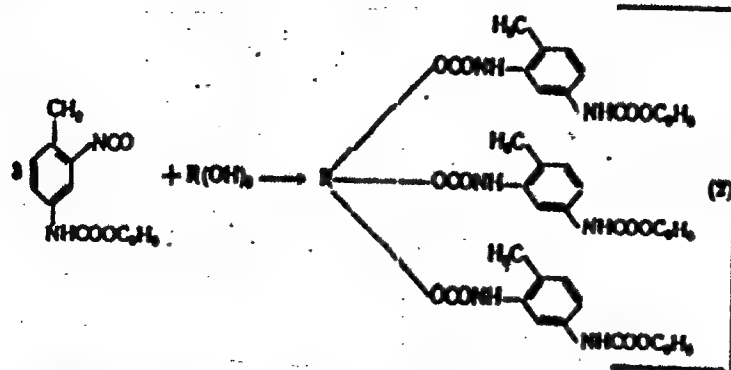

where  $R(OH)_3$  is polymeric alkyl or aryl glycidate. One- and two-component coatings were obtained from the "blocked" urethanes. The coatings can be hardened by heat treatment; 1.5 hours at 160C proved to be optimal conditions. The obtained films have excellent appearance, good physical and mechanical properties, and high chemical stability. Orig. art. has: 3 figures and 5 tables. (VS)

SUB CODE: 11/ SUBM DATE: none/ ORIG REF: 005/ ATD PRESS: 4175

QC  
Cord 2/2

KOCHNYEV, M. I.

30168

Izmeneniye slobodoy energii i teplosoderzaniya pri pyeaktsiyakh obrazovaniya  
arsenidov kobal'ta zhurnal prikl. Khimii, 1969, No. 9, C. 970-77.--Bibliogr: 6 nazv

SO: LETOPIS' NO. 34

KOCHNOWSKI, Gustaw; WISNIEWSKI, Josef

Favorable results of glucocorticoid therapy in a pulmonary form of Besnier-Boeck-Schaumann disease. Polski tygod.lek. 15 no.28: 1071-1073 11 J1 '60.

1. Ze Szpitala Przemyslawskiego w Pilchovicach k/Olivic;  
dyrektor: lek. med. G.Kochnowski  
(SARCOIDOSIS ther)  
(LUNG DISEASES ther)  
(ADRENAL CORTEX HORMONES ther)

KOCHNOWSKI, Gustaw

A case of pulmonary tuberculosis complicated by acute spontaneous pericarditis. Gruslica 28 no.8:665-668 Ag '60.

1. Ze Szpitala Przeciwgrusliczego w Pilchowicach kolo Olivic  
Dyrektor: lek. med. G.Kochnowski.

(TUBERCULOSIS, PULMONARY case reports )

(PERICARDITIS case reports)

KOCHNOWSKI, Gustav; ROZEK, Gerard

Permanent cure in a case of fresh tuberculous empyema treated with antibacterial drugs and hyaluronidase. Gruslica 29 no.12:1053-1055 D '61.

1. Ze Szpitala Przeciwgrusliczego w Pilchowicach kolo Gliwic Dyrektor: lek. med. G. Kochnowski.

(ANTITUBERCULAR AGENTS ther) (HYALURONIDASE ther)

KOCHNOWSKI, Gustaw

Results of the treatment of recent pulmonary tuberculosis  
with large doses of INH. Gruslica 31 no.3:263-266 '63.

1. Ze Szpitala Przeciwgrusliczego w Pilchowicach kolo Olivic  
Dyrektor Szpitala: lek. med. G. Kochnowski.  
(ISONIAZID) (TUBERCULOSIS, PULMONARY)



KOCHNOWSKI, Gustaw; ROZEK, Gerard


Fatal gastric cancer during the treatment of pulmonary tuberculosis with antibacterial drugs and cortisone. Pol. tyg. lek. 19 no.25:960-961 15 Je '64.

1. Szpitala Przeciwnrzelicznego w Pilchowiecach kolo Gliwic;  
dyrektor: lek. med. Gustaw Kochnowski.

KOCHO, DIMA, Cand Agr Sci -- (diss) "Norms and methods of irrigation of the cotton plant on meadow-swamp soils of the Chirchik River Valley." Tashkent, 1960. 16 pp; (State Committee of Higher and Secondary Specialist Education under the Council of Ministers Uzbek SSR, Tashkent Agricultural Inst); 200 copies; price not given; (KL, 26-60, 141)

SEMENENKO, P.; GUDOV, V.; SUKHMEN, L.; FADEYEV, I.; KOCHO, V., doktor  
tekh.nauk

"Steel pourer" by D.A.Smoliarenko. Reviewed by P.Semenenko  
and others. Metallurg 8 no.1:39-40 Ja '63. (MIRA 16:4)  
(Steel ingots)  
(Smoliarenko, D.A.)

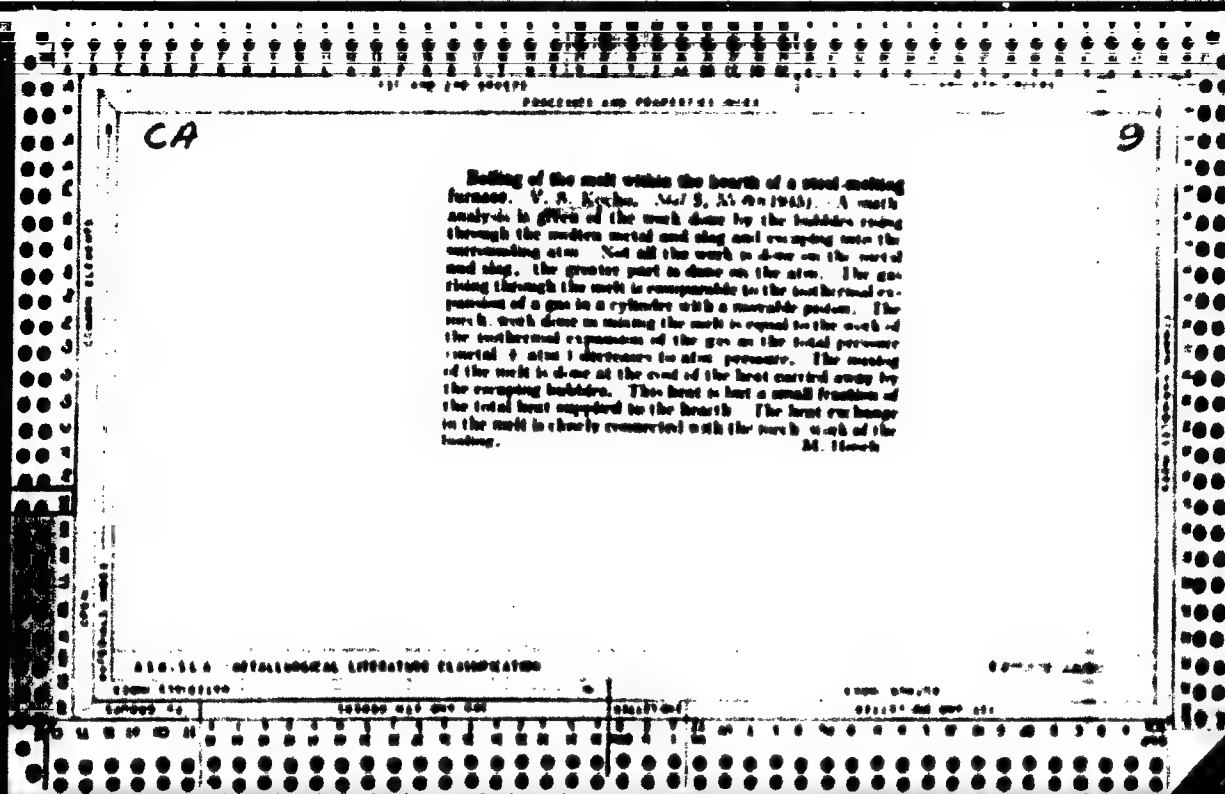





MEASUREMENT OF THE TEMPERATURE OF LIQUID STEEL BATHS USING A COMBINED  
THERMOELECTRIC COUPLE OR BY OTHER METHODS. V. S. Kasha.  
(Zavodskaya Laboratoriya, 1946, vol. 12, No. 7-8, pp. 702-711) (in  
Russian)





CA

7

Temperature of metal and carbon content along the depth of an open hearth. V. P. Kozlov, *Izv. Vuzov* (1947). The temp. and the C content of the metal were studied on the floor and at the surface (under the slag) of a 60-ton basic hearth 700 mm. deep. Preliminary tests showed that on the same level the temp. of the melt differed very little throughout the bath. When, for some reason, the bath cooled, a temp. gradient of up to 15° per m. was observed and the C content varied 0.14-0.18%. At a normal run, the temp. gradient did not exceed 5-15° per m. and the C content did not vary more than 0.10-0.04%. Normal run can be caused by intense stirring of the melt which depends largely on the rate of decarburization, depth of hearth, and viscosity of metal, all of which is determined by the intensity of heating (cf. C.A. 41, 2837). Increasing depth of hearth impedes circulation of melt. In the finishing period the


temp. of the metal should be 30-40° and before tapping 20-30° above the liquidus line. This is necessary to provide a reserve of heat to balance the heat losses during tapping, keeping in bath, and turning. M. Novich


ASO-11-A METALLURGICAL LITERATURE CLASSIFICATION

CA

9

Thermocouple for liquid steel. — N. H. Kitcher. Zoned.  
above Lab. 13, Oct 9 (1947). — A light-mt. construction of  
a Pt-PtRh thermocouple, housed in a heat steel tube,  
used in immersion. N. Thru

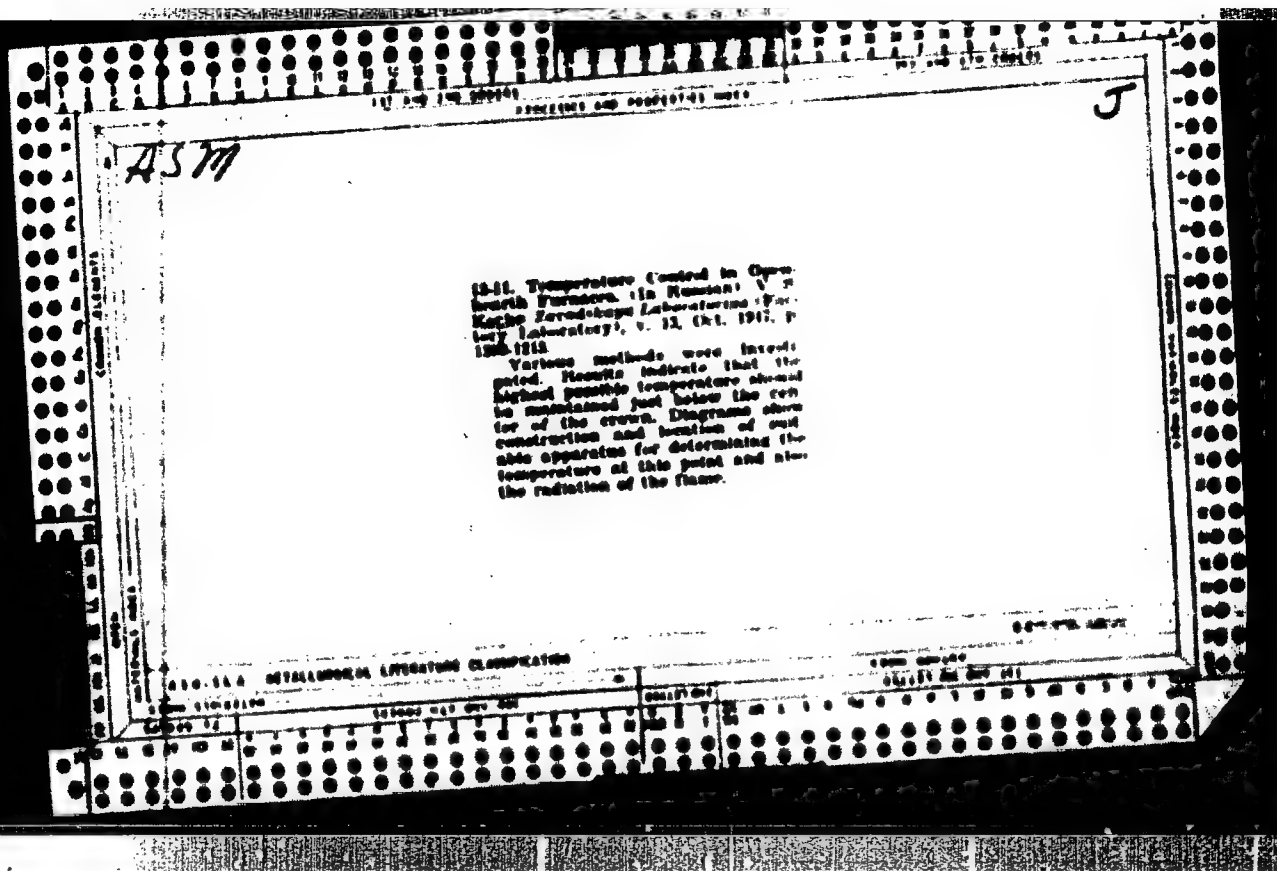

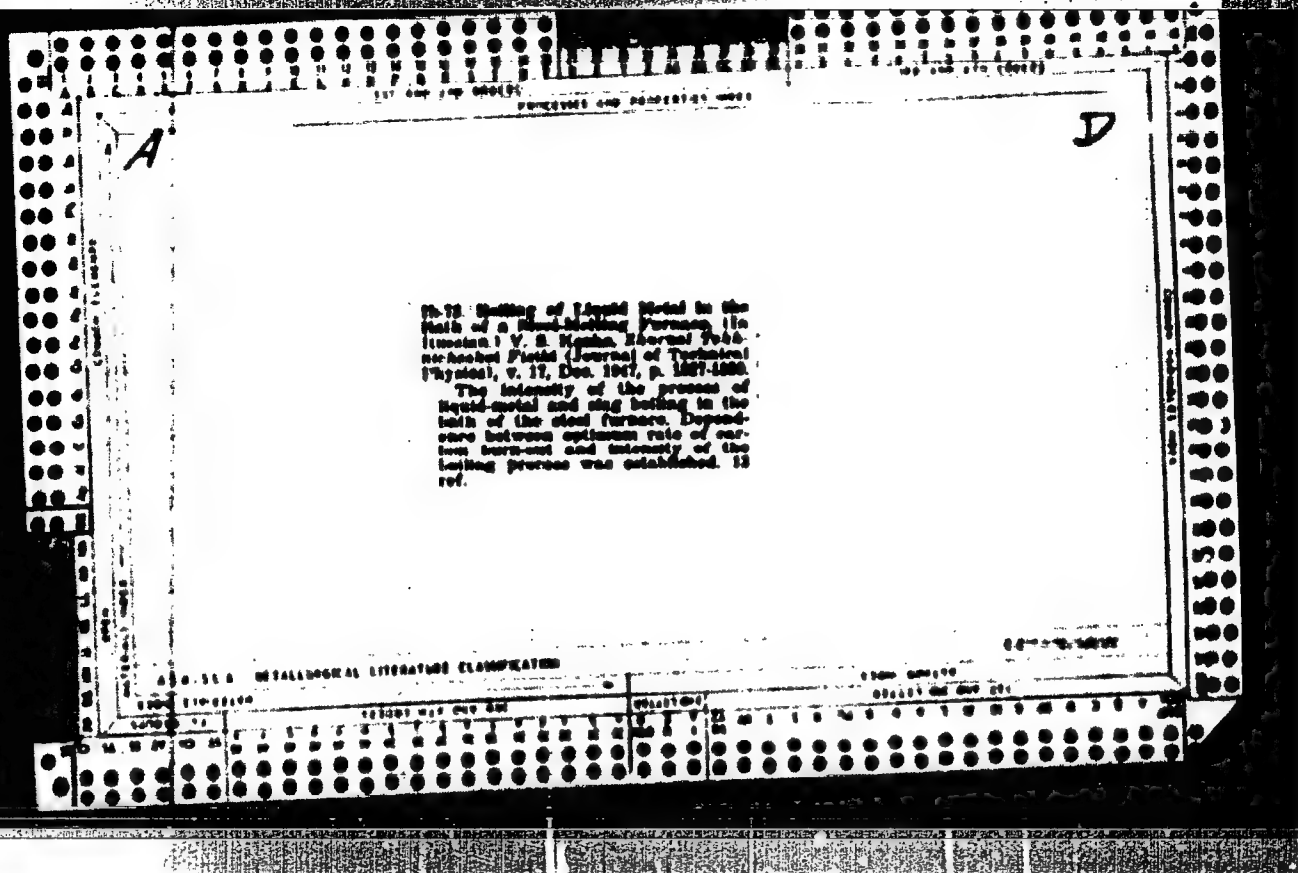

KOCHO, V.S.


35291. Elektricheskaya gibkaya bvratnaya svyaz, V SB:50 Let Kievsk politekho. In-Ta Kiev, 1948 S. 527-34 Bibliogr: 5 Nazv.

SO: Letopis' Zhurnal'nykh Statey, Vol. 34, 1949 Moskva

Kochko, V. S.

Kochko, V. S. "Decarbonization rate and intensity of the boiling cauldron in the open-hearth furnace," *Investiya Kiyevsk. politekhn. in-ta*, Vol VIII, 1948 (on cover: 1949), p. 179-73, - Bibliogr: 10 items

SO: U-5241, 17 December, 1953, (Letopis 'Zhurnal 'nakh Statey, No. 26, 1949)

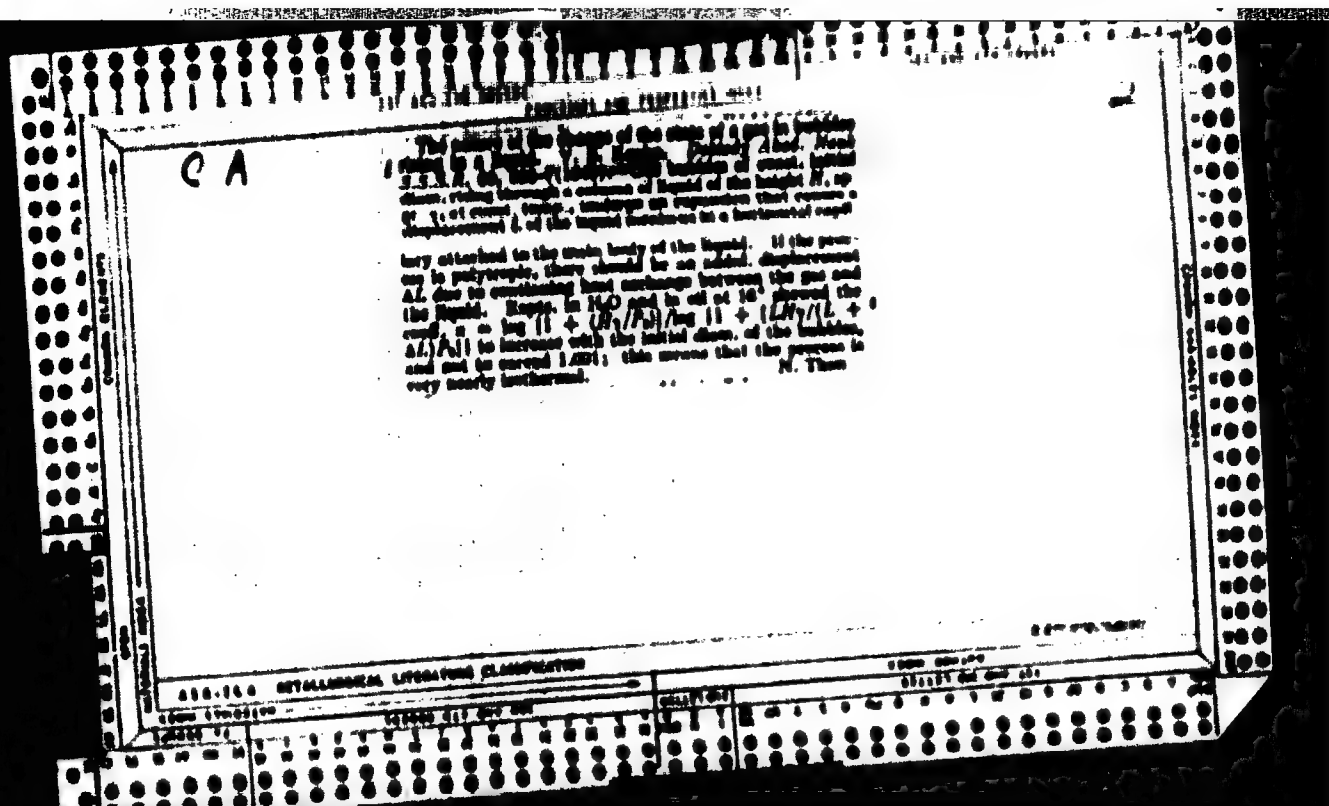

KOCHO, V. S.

KOCHO, V. S. -- "Investigation of Heat (Thermal) Processes in the Bath of a Steel Furnace." Sub 7 Oct 52, Inst of Metallurgy (Inst. of Metallurgy, Acad Sci USSR). (Observation for the Degree of Candidate

in Technical Sciences).

SO: Vechernaya Moskva, January December 1952

KOCID, V. S.

U.S.S.R. Metallurgy - Steel, Technology, Processes Jul 52

"Temperature Conditions of Metal and Slag, and Heat Flow in Steel-Melting Electric Furnaces," V. S. Kochko

"Is Ak Nauk, Otdel Tesh Nauk" No 7, pp 1045-1060

Investigates variations in temps of metal and slag, and flows of heat in basic elec-arc furnaces of 25-ton capacity to establish optimum elec conditions of furnace operation and to improve technological process of steelmaking. Establishes among other

228087

factors that rate of heat absorption during mp is 2-3 times greater than during boiling and refining. Possible shortening of last 2 periods contributes to increase of furnace efficiency. Demonstrates expediency of using immersed thermocouples for process control. Submitted by Acad I. P. Bardin 19 Jan 52.

228087



**"APPROVED FOR RELEASE: 09/18/2001**

**CIA-RDP86-00513R000723520012-9**

**APPROVED FOR RELEASE: 09/18/2001**

**CIA-RDP86-00513R000723520012-9"**

**"APPROVED FOR RELEASE: 09/18/2001**

**CIA-RDP86-00513R000723520012-9**

**APPROVED FOR RELEASE: 09/18/2001**

**CIA-RDP86-00513R000723520012-9"**

KOCHO, V.S., professor, doktor tekhnicheskikh nauk

"Industrial measurement of the temperature of liquid iron alloys."  
Zav.lab.22 no.71853-885 '56. (ML3A 9:12)  
(Thermocouples) (Iron--Metallurgy)

DANIKHELEK, A., doktor, inzh.; MIKHAYLOV, O.A., kand. tekhn. nauk;  
GONCHARENKO, N.I.; KLIMASHENKO, L.S.; OYKS, G.N., prof., doktor  
tekhn. nauk; SEMENENKO, P.P.; MOROZOV, A.N., prof., doktor tekhn.  
nauk; GLINKOV, M.A., prof., doktor tekhn. nauk; KAZANTSEV, I.O.,  
prof., doktor tekhn. nauk; KOCHO, V.A., prof., doktor tekhn. nauk;  
KURKOSH, Sh., kand. tekhn. nauk; KURKOSH, L.I., kand. tekhn.  
nauk; GURSKII, G.V.; SPERANSKIY, V.G.; NOVIK, L.M., kand. tekhn.  
nauk, starchyy nauchnyy sotrudnik; SHUMYLOV, Ya.A., kand. tekhn.  
nauk; PAFUSH, A.G., kand. tekhn. nauk; MALOV, V.F.; SAMARIN, A.M.

Discussions. Muz. TSVICHN no.18/19:17-35 '57. (NIRA 11:4)

1. Glavnyy staleplavil'shchik Ministerstva metallurgicheskoy pro-  
myshlennosti i rudnikov Chexoslovatskoy respubliky (for  
Danikheleka). 2. Direktor Tsentral'nogo instituta informatsii chernoy  
metallurgii (for Mikhaylov). 3. Direktor Ukrainskogo instituta  
metallov (for Goncharenko). 4. Glavnyy staleplavil'shchik  
Kuznetskogo metallurgicheskogo kombinata (for Klimashenko). 5. Zave-  
duyushchiy kafedroy metallurgii stali Moskovskogo instituta stali  
(for Oyks). 6. Zamestitel' glavnogo inzhenera zavoda im. Serova  
(for Semenenko). 7. Zaveduyushchiy kafedroy metallurgii stali  
Chelyabinskogo politekhnicheskogo instituta (for Morozov). 8. Zave-  
duyushchiy kafedroy metallurgicheskikh pechey Moskovskogo instituta  
stali (for Glinkov). 9. Zaveduyushchiy kafedroy metallurgii stali  
Zhdanovskogo metallurgicheskogo instituta (for Kazantsev). 10. Zave-  
duyushchiy kafedroy metallurgii stali Kiyevskogo politekhnicheskogo  
instituta (for Kocho).  
(Continued on next card)

DANIKHELIKA, A.—(continued) Card 2.

11. Nachal'mik tekhnicheskogo otdela Ministerstva chernoy metallurgii Vengerskoy Narodnoy Respubliki (for Moksah). 12. Zamestitel' direktora Novotul'skogo metallurgicheskogo zavoda (for Gurskiy). 13. Nachal'mik tekhnicheskogo otdela zavoda "Dneprospetstal' (for Speranskiy). 14. Institut metallurgii im. Baykova AN SSSR (for Movik). 15. Nachal'mik staleplavil'noy laboratorii Ukrainetskogo instituta metallov (for Shneyerov). 16. Nachal'mik laboratorii po nepreryvnoy raslivke stali Khdanovskogo filiala Tsentral'nogo nauchno-issledovatel'skogo instituta Ministerstva stroitel'noy promyshlennosti (for Papush). 17. Nachal'mik martenovskogo tsakha zavoda "Zaporozhstal'" (for Mamov). 18. Zamestitel' direktora Instituta metallurgii im. Baykova AN SSSR, chlen-korrespondent AN SSSR (for Samarin).

(Steel—Metallurgy)

KHODAKOVSKIY, V.V.; YEFIMOV, V.A., kand. tekhn. nauk, starshiy nauchnyy rabotnik; KOSENKO, P.Ye., kand. tekhn. nauk; KAZAKOVICH, S.S.; LAPITSKIY, V.I., prof., doktor tekhn. nauk; FILIP'YEV, O.V.; STROGANOV, A.I., kand. tekhn. nauk, dots.; DEMIDOVICH, A.V.; BORNATSKIY, I.I., kand. tekhn. nauk; MUKHOMOROVSKIY, M.Ya., dots.; ~~KOGHO, V.G.~~; prof., doktor tekhn. nauk; RYN'KOV, V.I.; LOMAKIN, L.M., mladshiy nauchnyy sotrudnik; KOKAROV, N.I., dots.; KLYUCHAROV, A.P.; PLYUSHECHENKO, Ye.A.; KAPUSTIN, Ye.A., kand. tekhn. nauk, dots.; KORNIA, I.I., kand. tekhn. nauk, nauchnyy sotrudnik; SHIROKOV, G.I.; UGRICHIN, P.V., prof., doktor tekhn. nauk; LEBEVA, K.I.; ZHIGULIN, V.I.; MOROKOV, P.K.; KHLBENIKOV, A.Ye., prof., doktor tekhn. nauk, starshiy nauchnyy sotrudnik; TARASOV, N.S.; NIKOLAYEV, A.G.

Discussions. Bul. TSENTRON no.18/19:40-66 '57.

(MIRA 11:4)

1. Starshiy inzhener Glavspetsstali Ministerstva chernoy metallurgii SSSR (for Khodakovskiy). 2. Institut gasa (for Yefimov). 3. Direktor Dneprodzershinskogo metallurgicheskogo instituta (for Kosenko). 4. Nachal'nik laboratorii Leningradskogo instituta ogneporov (for Kazakovich). 5. Zaveduyushchiy kafedroy metallurgii stali Dnepropetrovskogo metallurgicheskogo instituta (for Lapitskiy). 6. Nachal'nik laboratorii Giprestali (for Filip'yev). 7. Chelyabinskii politekhnicheskiy institut (for Stroganov). 8. Nachal'nik teplotekhnicheskoy laboratorii Severakogo metallurgicheskogo savoda (for Demidovich). 9. Zamestitel' nachal'nika Tsentral'noy savodskoy laboratorii Maksyevskogo metallurgicheskogo savoda (for Bornatskiy).

(Continued on next card)

**KHODAKOVSKIY, V.V.**---(continued) Card 2.

10. Sibirskiy metallurgicheskiy institut (for Medshiboshakiy).
11. Zaveduyushchiy kafedroy metallurgii stali Kiyevskogo politekhnicheskogo instituta (for Kocho).
12. Ispolnyayushchiy obyazannosti glavnogo inzhenera Belorusskogo metallurgicheskogo kombinata (for Ryn'kov).
13. Vsesoyuznyy nauchno-issledovatel'skiy institut metallurgicheskoy teplotekhniki (for Lomakin).
14. Ural'skiy politekhnicheskii institut (for Kokarev).
15. Zamestitel' nachal'nika teplotekhnicheskoy laboratorii Mishne-Tagil'skogo metallurgicheskogo kombinata (for Klyucherov).
16. Nachal'nik teplotekhnicheskoy laboratorii Tsentral'noy zavodskoy laboratorii zavoda im. Voroshilova (for Plyushchenko).
17. Khdanovskiy metallurgicheskiy institut (for Kapustin).
18. Institut metallurgii im. Baykova AN SSSR (for Kobesa).
19. Nachal'nik laboratorii martenovskikh pechey Vsesoyuznogo nauchno-issledovatel'skogo instituta metallurgicheskoy teplotekhniki (for Shirokov).
20. Zaveduyushchiy kafedroy metallurgii stali Ural'skogo politekhnicheskogo instituta (for Umrikhin).
21. Nachal'nik metallurgicheskoy laboratorii Tsentral'noy zavodskoy laboratorii Zakavkazskogo metallurgicheskogo zavoda (for Leshava).
22. Zamestitel' glavnogo inzhenera zavoda im. Petrovskogo (for Zhigulin).
23. Nachal'nik martenovskogo tsokha Muznetskogo metallurgicheskogo kombinata (for Morokov).
24. Institut metallurgii im. Baykova AN SSSR (for Khlebaikov).
25. Glavnyy inzhener Petrovsk-Zabaykal'skogo metallurgicheskogo zavoda (for Tarasov).
26. Nachal'nik tsokha Magnitogorskogo metallurgicheskogo kombinata (for Nikolayev).

(Open-hearth process)

KOCHO, V.B., prof., doktor tekhn. nauk; GRANKOVSKIY, V.I., inzh.; MOLCHANOV,  
Yu.D., inzh.; FLOSHCHENKO, Ye.A., inzh.

Heating open-hearth furnaces of 500 ton capacity with hot coke gas.  
Bul. TSNIICEM no.1:11-15 '58. (MIRA 11:5)  
(Open hearth furnaces)



SOV/137-58-10-20563

Translation from: Referativnyy zhurnal, Metallurgiya, 1958, Nr 10, p 31 (USSR)

AUTHORS: Kocho, V.S., Granovskiy, V.I., Ploshchenko, Ye.A.

TITLE: An Investigation of the Thermal Functioning of Open-hearth Furnaces in Which Compressed Air is Delivered in the Checker Port (Issledovaniye teplovoy raboty martenovskikh perhey, rabotayushchikh s podachey szhatogo vozdukha v golovki)

PERIODICAL: Izv. vyssh. uchebn. zavedeniy. Chernaya metallurgiya, 1958, Nr 1, pp 112-116

ABSTRACT: 4000-4500 m<sup>3</sup> compressed air from blast-furnace turbo-blowers is delivered per hour into the ends of the gas tank of the 220-t ovens at the Voroshilovsk Metallurgical Plant. The employment of compressed air improves the fuel combustion process, thus making it possible to reduce the excess-air coefficient from 1.5-1.8 to 1.05-1.15. Heating of the gas checkers is increased by 100-150°C. The tank-lining life is increased from 80 to 200 heats, and dust loss is reduced. The slag pockets require cleaning every 280-350 instead of 130-160 heats. The rate of C burn-off during the finishing period is 8 to 15% greater. When compressed air is employed, the melting

Card 1/2

SOV/137-58-10-20563

An Investigation of the Thermal Functioning of Open-hearth Furnaces (cont.)

period is 20 minutes shorter, and the working period 13 minutes. The unit consumption of fuel, in conventional units, is 13% less. Delivery of compressed air makes it possible to maintain higher heat inputs and obtain higher output rates from the furnaces. The heat intake of the bath rises by 40-60% with an air consumption of 2000 m<sup>3</sup>/hr, and even more at 4500 m<sup>3</sup>/hr. In the second half of the furnace, heat absorption declines when air is supplied, sometimes going to values close to zero. For a 250-500-t furnace, the optimum compressed-air delivery is 3000-5000 m<sup>3</sup>/hr; the precise amount requires determination by experiment in each individual instance.

G.G.

1. Open hearth furnaces--Operation
2. Open hearth furnaces--Thermodynamic properties
3. Oxygen--Applications

Card 2/2

130-58-2-6/21

AUTHORS: Kocher, V.S., Doctor of Technical Sciences, Professor,  
Orankovskiy, V.I., Molchanov, Yu.D. and Ploshchenko, Ye.A.

TITLE: Open-hearth Furnace Operation on High-calorific Value Low-  
pressure Gas (Rabota martenovskikh pechey na vysokokalor-  
lynom goryachem gase nizkogo davleniya)

PERIODICAL: Metallurg, 1958, Nr 2, pp 9 - 12 (USSR).

ABSTRACT: Blast-furnace gas is normally added to coke-oven gas for firing open-hearth furnaces to improve flame quality. The low calorific value of blast-furnace gas, however, lowers the theoretical flame temperature and an investigation has been carried out by the imeni Voroshilova (imeni Voroshilov) metallurgical works together with the Kiyevskiy politekhnicheskii institut (Kiev Polytechnical Institute) of furnace firing without the addition. The authors mention this work in which pure coke-oven gas was used with the addition of turbine air into the side of the gas port and describe the adoption of practice with reduced (halved) quantities of blast-furnace gas which followed the completion of the first part of the work. On 250 and 500-ton furnaces, the blast-furnace gas consumptions were 3 000 and 4 500 m<sup>3</sup>/hour, respectively, the coke-oven gas consumptions remaining unchanged and the specific fuel consumption being equivalent to the decrease in blast-furnace

Card1/3

130-58-2-6/21

## Open-hearth Furnace Operation on High-calorific Value Low-pressure Gas

gas consumption. By increasing the port cross-sections, an equally high temperature (about 1350 °C) was obtained for gas and air checkers. The slag pockets filled less rapidly, a higher furnace temperature and increased heat flows were obtained with the new practice: measurements with VNIIT-designed probes on a 500-ton furnace are shown graphically. Three experimental heats were carried out on a 500-ton furnace without blast-furnace gas and the averages of the main operating results for this and ordinary operation are tabulated (Table 1): the authors discuss these briefly and point out that there seems to be an optimal gas pre-heat temperature. They consider the functioning of the gas checkers with pure coke-oven gas. A failure of the lining of the gas ports on a 500-ton furnace led to the combustion products losing enough heat to prevent overheating of the gas checkers and the furnace was worked on coke-oven gas continuously for 1 1/2 months. The operating results show (Table 2) mean decreases of 0.7 hours and 21.8 kg/ton for tap-to-tap time and consumption of standard fuel, respectively. The authors recommend the coke-oven gas firing of furnaces without blast-furnace gas, the cross-sectional area of the gas ports being reduced to reduce the flow of combustion products

Card 2/3